


MINI DIAL INDICATOR



- With calibration certificate

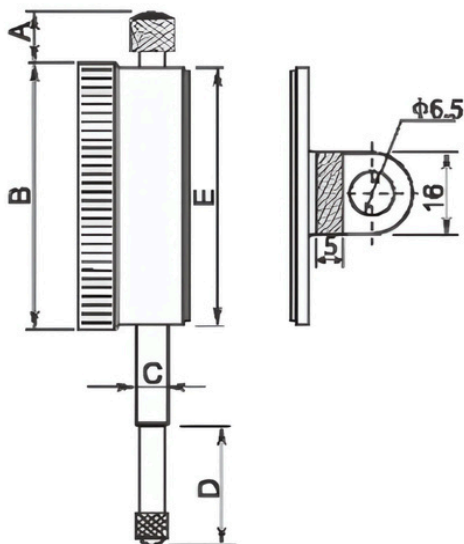

- Used to measure surface flatness as well as axial runout and also used to check tool set up and squareness



- Limit indicator clips included
- Strictly made in accordance with DIN878
- Jeweled bearings providing the lowest possible bearing friction
- With narrowed range and higher accuracy

Unit:mm

Code	Range	Graduation	Style	A	B	C	D	E	Accuracy	Hysteresis
5121-1101	0-3	0.01	flat back	6.5	φ40	φ8	10.6	φ36	0.012	0.003
5121-1201	0-3	0.01	lug back	6.5	φ40	φ8	10.6	φ36	0.012	0.003
5121-1230	0-5	0.01	flat back	6.5	φ40	φ8	12.5	φ36	0.014	0.003
5121-1203	0-5	0.01	lug back	6.5	φ40	φ8	12.5	φ36	0.014	0.003