


## IP65 DIGITAL INDICATOR WITH 0.001MM RESOLUTION

**IP65**  
COOLANT & FLUID  
RESISTANT

mm  
in

Battery  
+  
CR2032

Data  
output

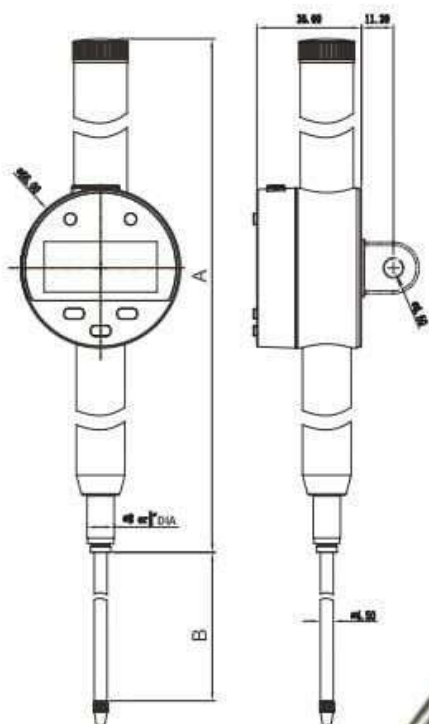

- Inductive measurement system
- IP65 protection against liquid
- Large LCD display with clear reading
- 3V Lithium battery CR2032
- SPC data output
- Tolerance preset and GO/NG judgement
- "+" or "-" direction set

Unit:mm

| Code      | Range         | Resolution     | A     | B     | Accuracy      | Repeatability |
|-----------|---------------|----------------|-------|-------|---------------|---------------|
| 5820-0005 | 0-12.7/0-0.5" | 0.001/0.00005" | 91.9  | 14.3  | 0.007/0.0003" | 0.003/0.0001" |
| 5820-0010 | 0-25.4/0-1.0" | 0.001/0.00005" | 129.2 | 27    | 0.008/0.0003" | 0.003/0.0001" |
| 5820-0015 | 0-50.8/0-2.0" | 0.001/0.00005" | 179.7 | 52    | 0.010/0.0004" | 0.003/0.0001" |
| 5820-0020 | 0-101.6/0-4"  | 0.001/0.00005" | 281.8 | 103.4 | 0.015/0.0006" | 0.003/0.0001" |