


MULTIFUNCTIONAL DIGITAL INDICATOR




- Glass grating for high accuracy and stable performance

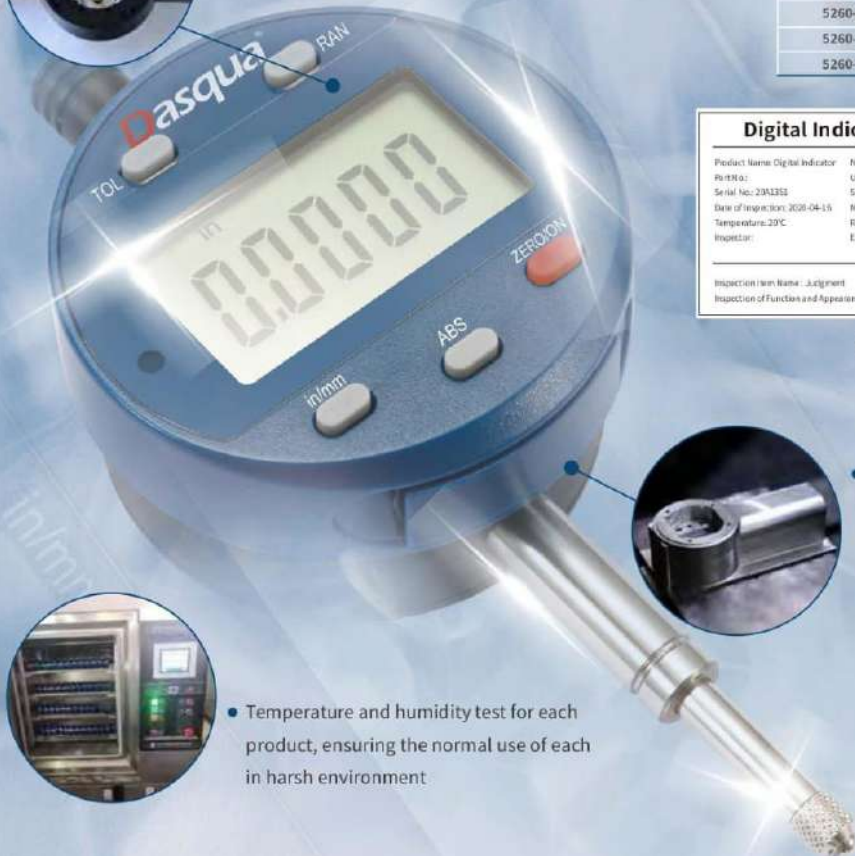

Unit: mm


Code	Range	Resolution	Accuracy
5260-3705	0-12.7/0-0.5"	0.01/0.0005"	0.02
5260-3710	0-25.4/0-1.0"	0.01/0.0005"	0.02
5260-3715	0-50.8/0-2.0"	0.01/0.0005"	0.02
5260-3720	0-101.6/0-4"	0.01/0.0005"	0.02

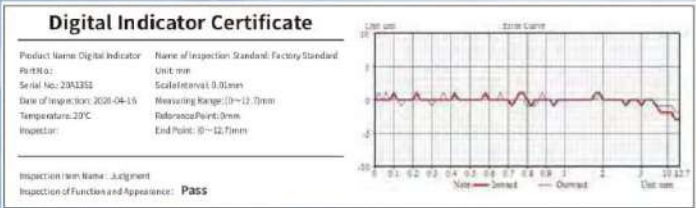


Each indicator is with a matched certificate.



- Temperature and humidity test for each product, ensuring the normal use of each in harsh environment



- Housing entirely cast made of high-strength alloy aluminum guaranteeing low deformation



• 5260-3705