





WATER PROOF INDICATOR

SHOCK
-PROOF

Water
proof

DIN
878

ISO
463

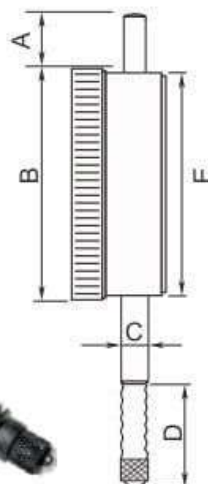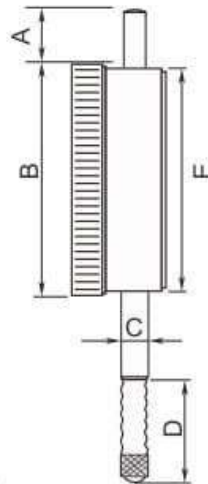

- O-ring seal on safety cap for bezel and rotating dial
- Strictly made in accordance with DIN878
- Used to measure surface flatness as well as axial runout and also used to check tool set up and squareness
- Hardened gears-lasting against indicator failure due to shock or wear

Unit:mm

Code	Range	Graduation	Style	A	B	C	D	E	Accuracy	Hysteresis	Protection Standard
5121-1106	0-10	0.01	flat back	16.5	φ58	φ8	27	φ53.5	0.017	0.003	IP54
5121-1107	0-10	0.01	lug back	16.5	φ58	φ8	27	φ53.5	0.017	0.003	IP54
5121-2106	0-1	0.001	flat back	10.5	φ63	φ8	21	φ55	0.005	0.002	IP67 Jeweled
5121-2107	0-1	0.001	lug back	10.5	φ63	φ8	21	φ55	0.005	0.002	IP67 Jeweled