


MAGNETIC BASE WITH FINE ADJUSTMENT

- 150° V-grooved base can be placed on the cylindrical surfaces as well as flat surfaces for easily fixing the indicators.
- Well selected ferrite permanent magnet with magnetic force greater than calibration value
- On/off switch for magnet, easy to move the base without the influence of magnetic force.



- Solid structure with surfaces electroplated and end-faces ground

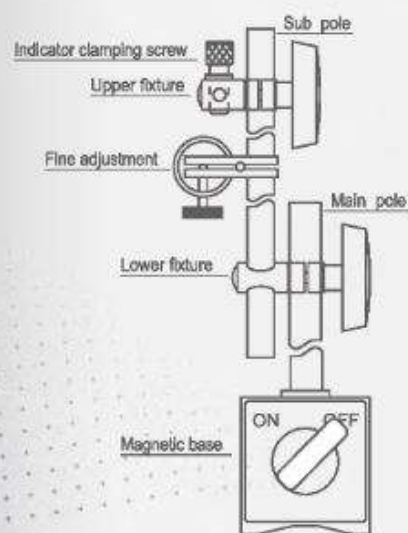

- With clamp holes of $\phi 4\text{mm}$, $\phi 8\text{mm}$, $3/8"$, which satisfy the use of most indicators and test indicators.



- With fine adjustment device, which is heat-treated to ensure stability and durability.



Unit:mm

Code	Holding Power	Base	Main Pole	Sub Pole	Dia. of Clamp Hold	Weight
7122-0004	60kg	60x50x55	$\phi 12 \times 176$	$\phi 10 \times 150$	$\phi 6/\phi 8$	1.5kg
7122-0005	60kg	60x50x55	$\phi 12 \times 176$	$\phi 10 \times 150$	$\phi 6/\phi 8$	1.5kg
7122-0010	100kg	73x50x55	$\phi 16 \times 255$	$\phi 14 \times 165$	$\phi 6/\phi 8$	2.3kg
7122-0015	130kg	117x50x55	$\phi 20 \times 355$	$\phi 14 \times 210$	$\phi 6/\phi 8$	3.7kg
7123-1004	60kg	60x50x55	$\phi 12 \times 176$	$\phi 10 \times 150$	$\phi 4/\phi 8/3/8"$	1.5kg
7123-1005	80kg	60x50x55	$\phi 12 \times 176$	$\phi 10 \times 150$	$\phi 4/\phi 8/3/8"$	1.5kg
7123-1010	100kg	73x50x55	$\phi 16 \times 255$	$\phi 14 \times 165$	$\phi 4/\phi 8/3/8"$	2.3kg
7123-1015	130kg	117x50x55	$\phi 20 \times 355$	$\phi 14 \times 210$	$\phi 4/\phi 8/3/8"$	3.7kg