




OUTSIDE MICROMETER

WITH STAINLESS STEEL SPINDLE

DIN 863

- Strictly made in accordance with DIN 863
- Spindle thread hardened, ground and lapped for ultimate accuracy
- With spindle lock
- Precision Ground STAINLESS STEEL threading rod replacing alloy/carbon steel threading rod mostly used in the industry

Code	Range	Graduation	A	B	C	L	W	H	Accuracy
4111-B105-A	0-25	0.01	31	29.5	φ6.5	133.8	58.5	φ18	0.004
4111-B110-A	25-50	0.01	56	38	φ6.5	160	76	φ18	0.004
4111-B115-A	50-75	0.01	81	51	φ6.5	185.5	91	φ18	0.005
4111-B120-A	75-100	0.01	106	63.5	φ6.5	210.5	105	φ18	0.005
4111-B125-A	100-125	0.01	131	76	φ6.5	237.3	125	φ18	0.006
4111-B130-A	125-150	0.01	156	89	φ6.5	263.8	142	φ18	0.006
4112-S105-A	0-1"	0.001"	31	29.5	φ6.5	133.8	58.5	φ18	0.00015"
4112-S110-A	1-2"	0.001"	56	38	φ6.5	160	76	φ18	0.00015"
4112-S115-A	2-3"	0.001"	81	51	φ6.5	185.5	91	φ18	0.0002"
4112-S120-A	3-4"	0.001"	106	63.5	φ6.5	210.5	105	φ18	0.0002"
4112-S125-A	4-5"	0.001"	131	76	φ6.5	237.3	125	φ18	0.00025"
4112-S130-A	5-6"	0.001"	156	89	φ6.5	263.8	142	φ18	0.00025"

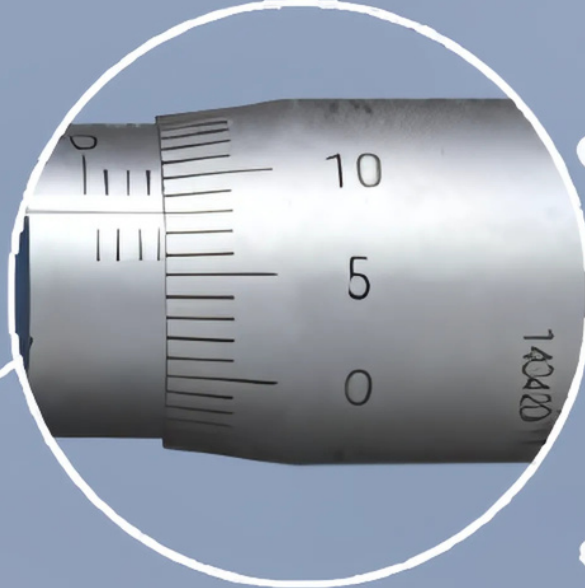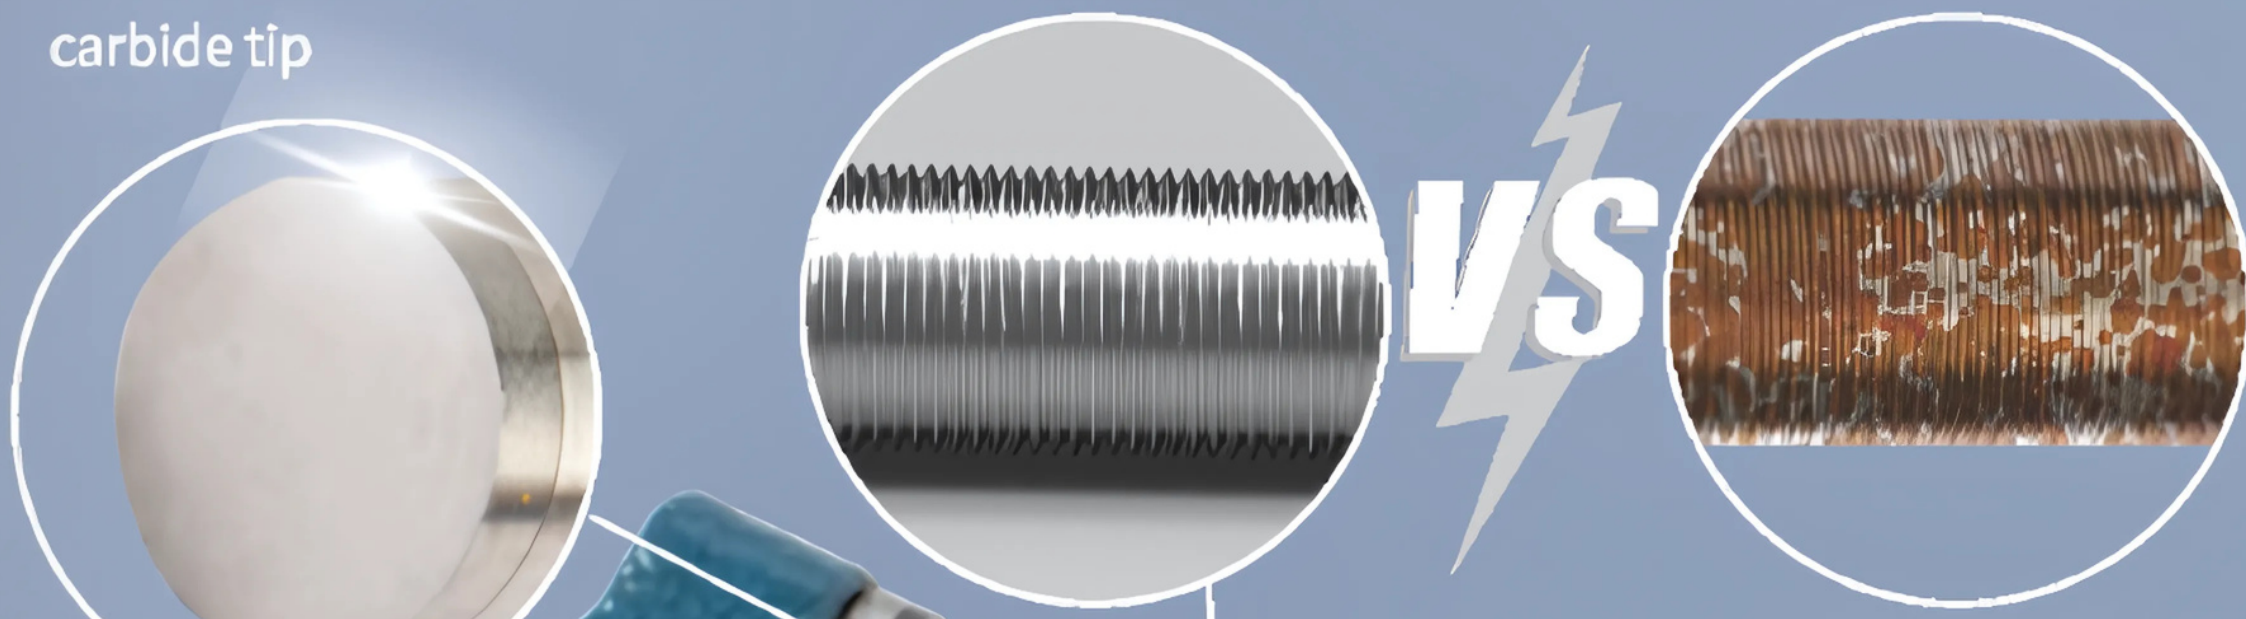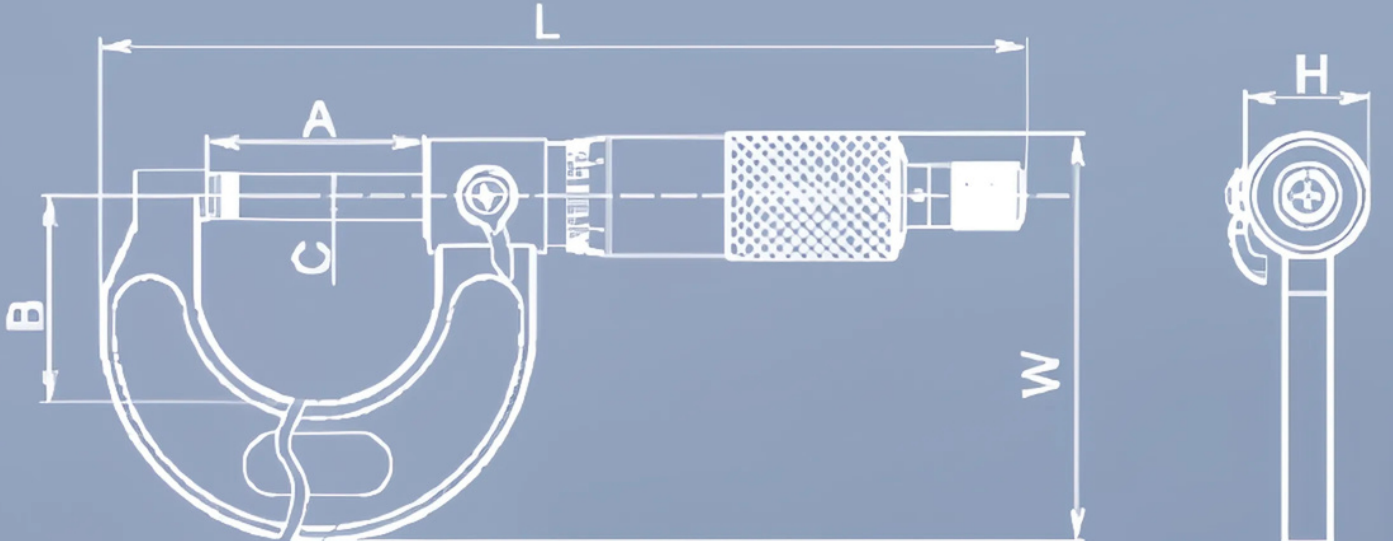

- Clear graduations laser-etched on satin chrome finish for easy reading
- With ratchet stop for constant force(5- 8N 20% better than the normal standard of 5-10N)

