

CONTACT DIGITAL TACHOMETER




- The tachometer uses microcomputer (CPU) technique; anti-jamming technique for contact measurement of rotation speed (RPM), surface speed (m/min), and contact length (m)



- Wide measuring range and high resolution
- Large screen LCD display provides clear reading



- White back light guarantee reading in any light environment
- Low battery voltage indication
- Surface speed wheel with groove to test surface speed or length of wire, cable, or rope conveniently
- Smooth housing design, comfortable to hold and use

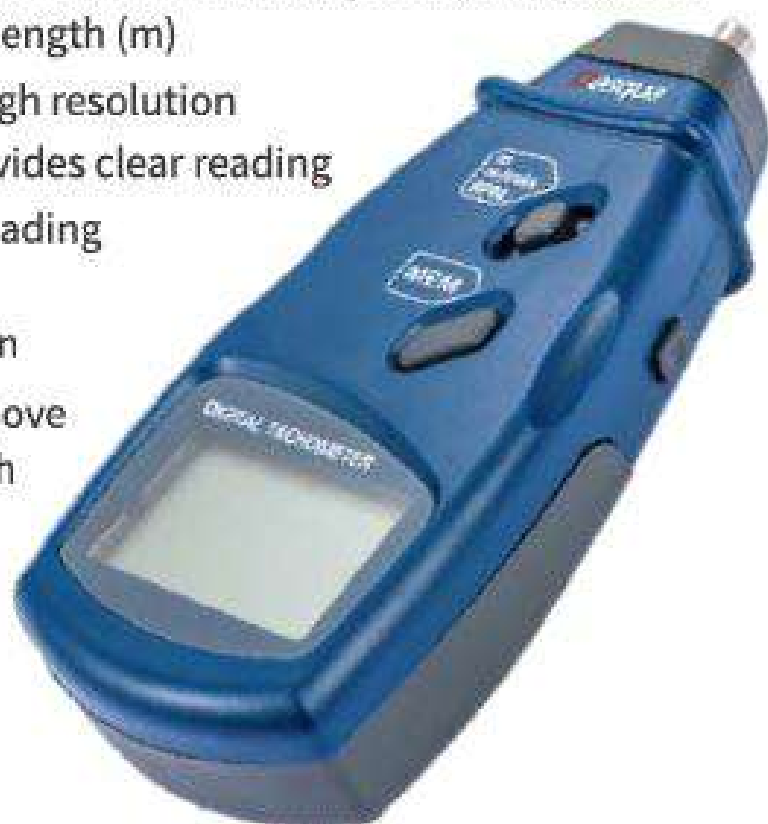

Code	1030-2056
Measuring Range	0.5~19999 RPM; 0.05~1999.9 m/min; 0.05~99999 m
Resolution	Rotation Speed: 0.1 RPM (0.5~999.9RPM)
	1 RPM (above 1000RPM)
	Surface Speed: 0.01m/min (0.05~99.99m/min)
	0.1m/min (above 100m/min)
Contact Length	0.02m (0.05~99999m)
Product Size	170mm x 70mm x 35mm
Accuracy	± (0.05%+1digital)
Sampling Time	0.8second (over 60RPM)
Power supply	3x1.5V AA battery
Time Base	6MHz Quartz crystal